


CONNECTING A SWM8 to a Genie (HR34/HMC) & (3) C31 Clients

(Using SWM1 Port, with DECA Router Package)

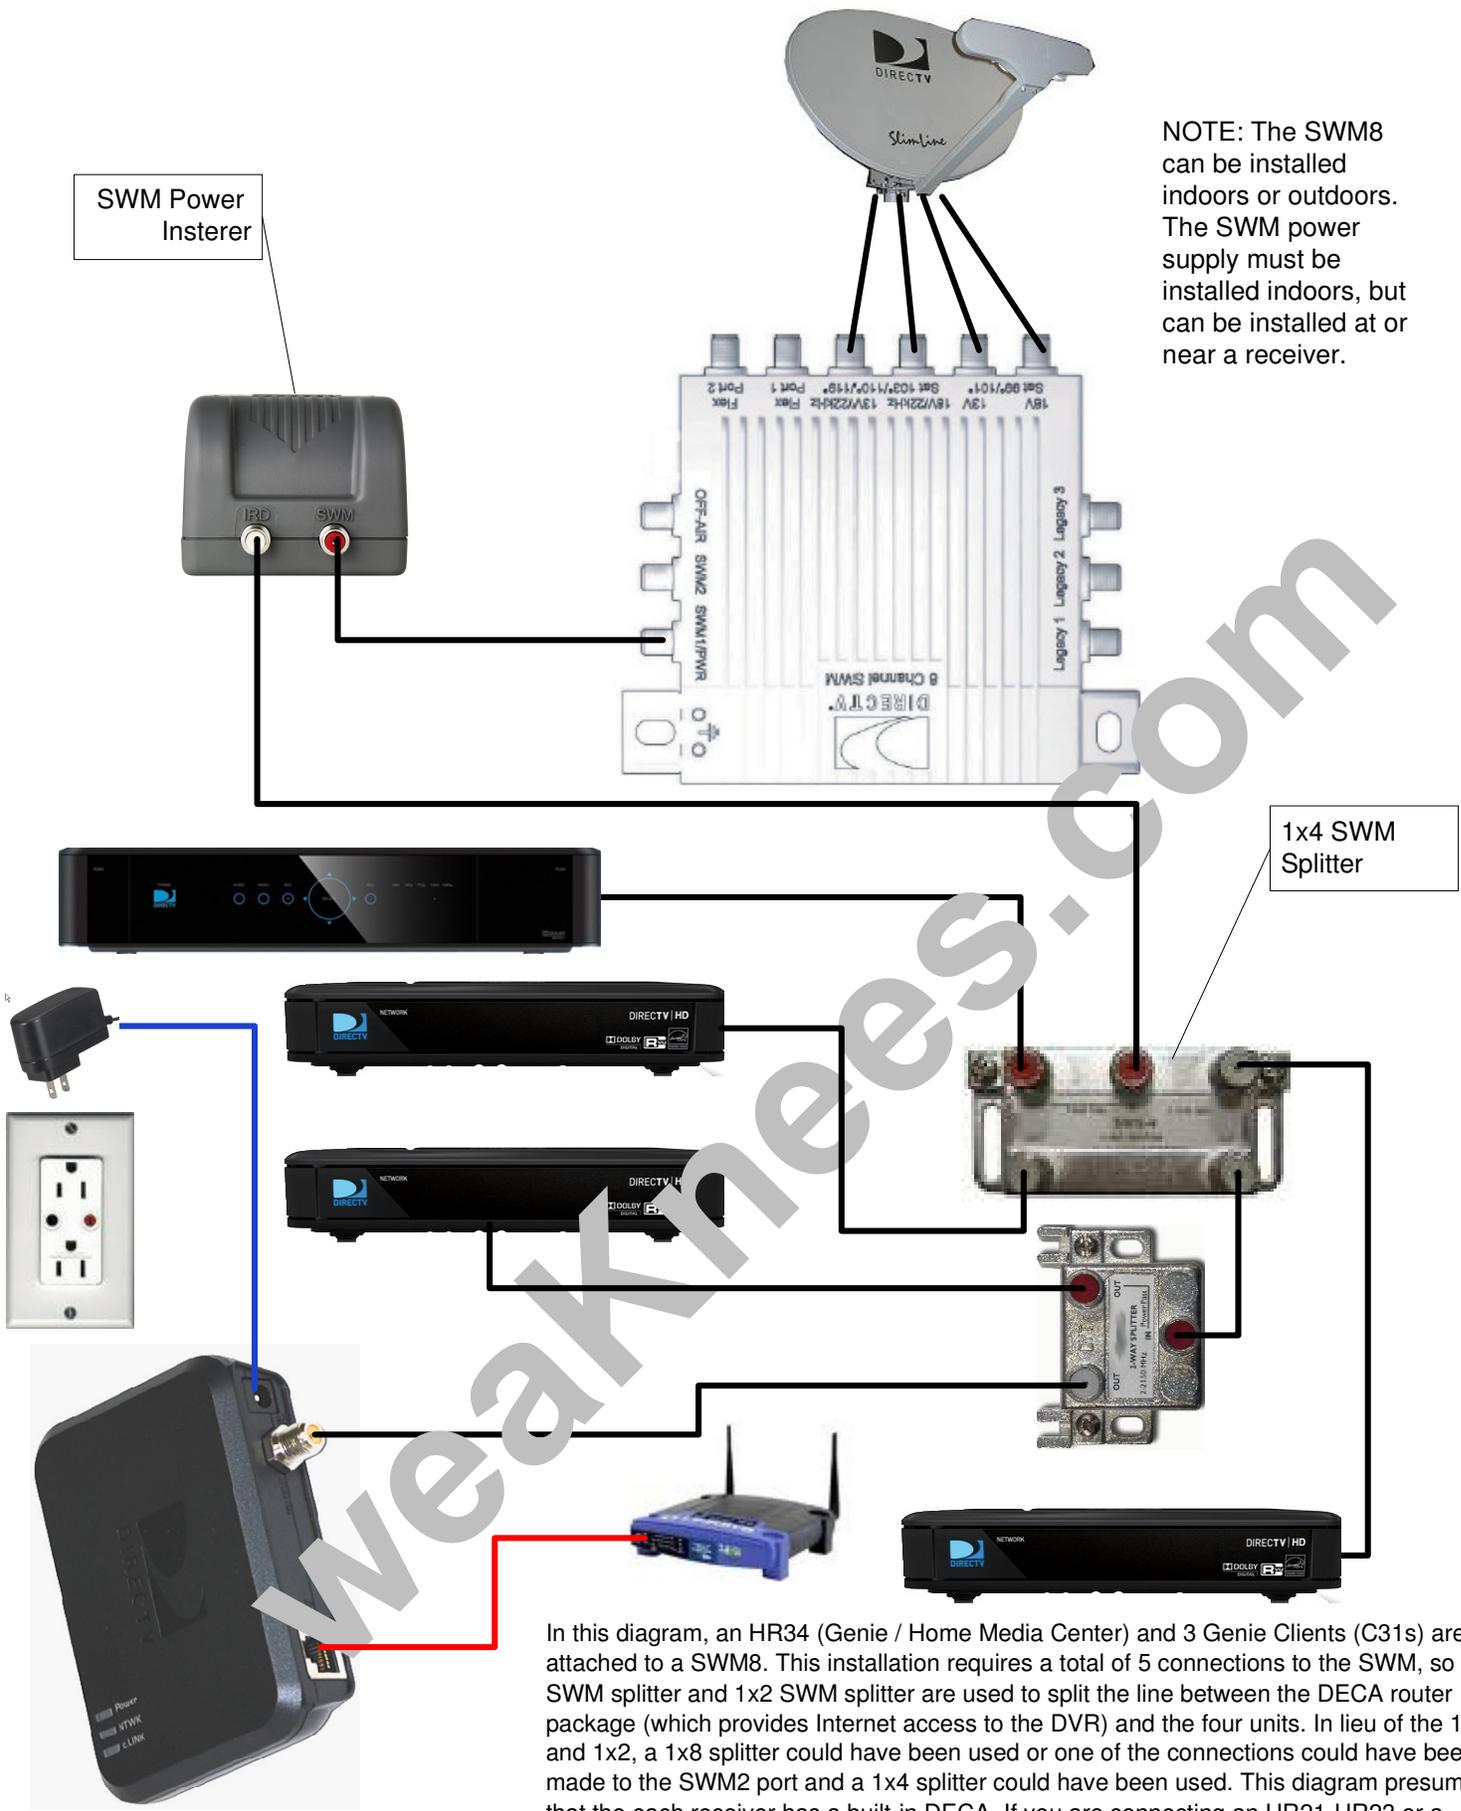

NOTE: The SWM8 can be installed indoors or outdoors. The SWM power supply must be installed indoors, but can be installed at or near a receiver.

1x4 SWM Splitter

In this diagram, an HR34 (Genie / Home Media Center) and 3 Genie Clients (C31s) are attached to a SWM8. This installation requires a total of 5 connections to the SWM, so a 1x4 SWM splitter and 1x2 SWM splitter are used to split the line between the DECA router package (which provides Internet access to the DVR) and the four units. In lieu of the 1x4 and 1x2, a 1x8 splitter could have been used or one of the connections could have been made to the SWM2 port and a 1x4 splitter could have been used. This diagram presumes that each receiver has a built-in DECA. If you are connecting an HR21-HR23 or a THR22, a separate DECA adapter is required at the receiver if you are also connecting a DECA Router Package.

NOTE: Your DECA Router Package may vary from the one pictured, but the connections on all DECA Router Packages are the same.

- Coax cable
- Power Cable
- Ethernet (Cat-5)